
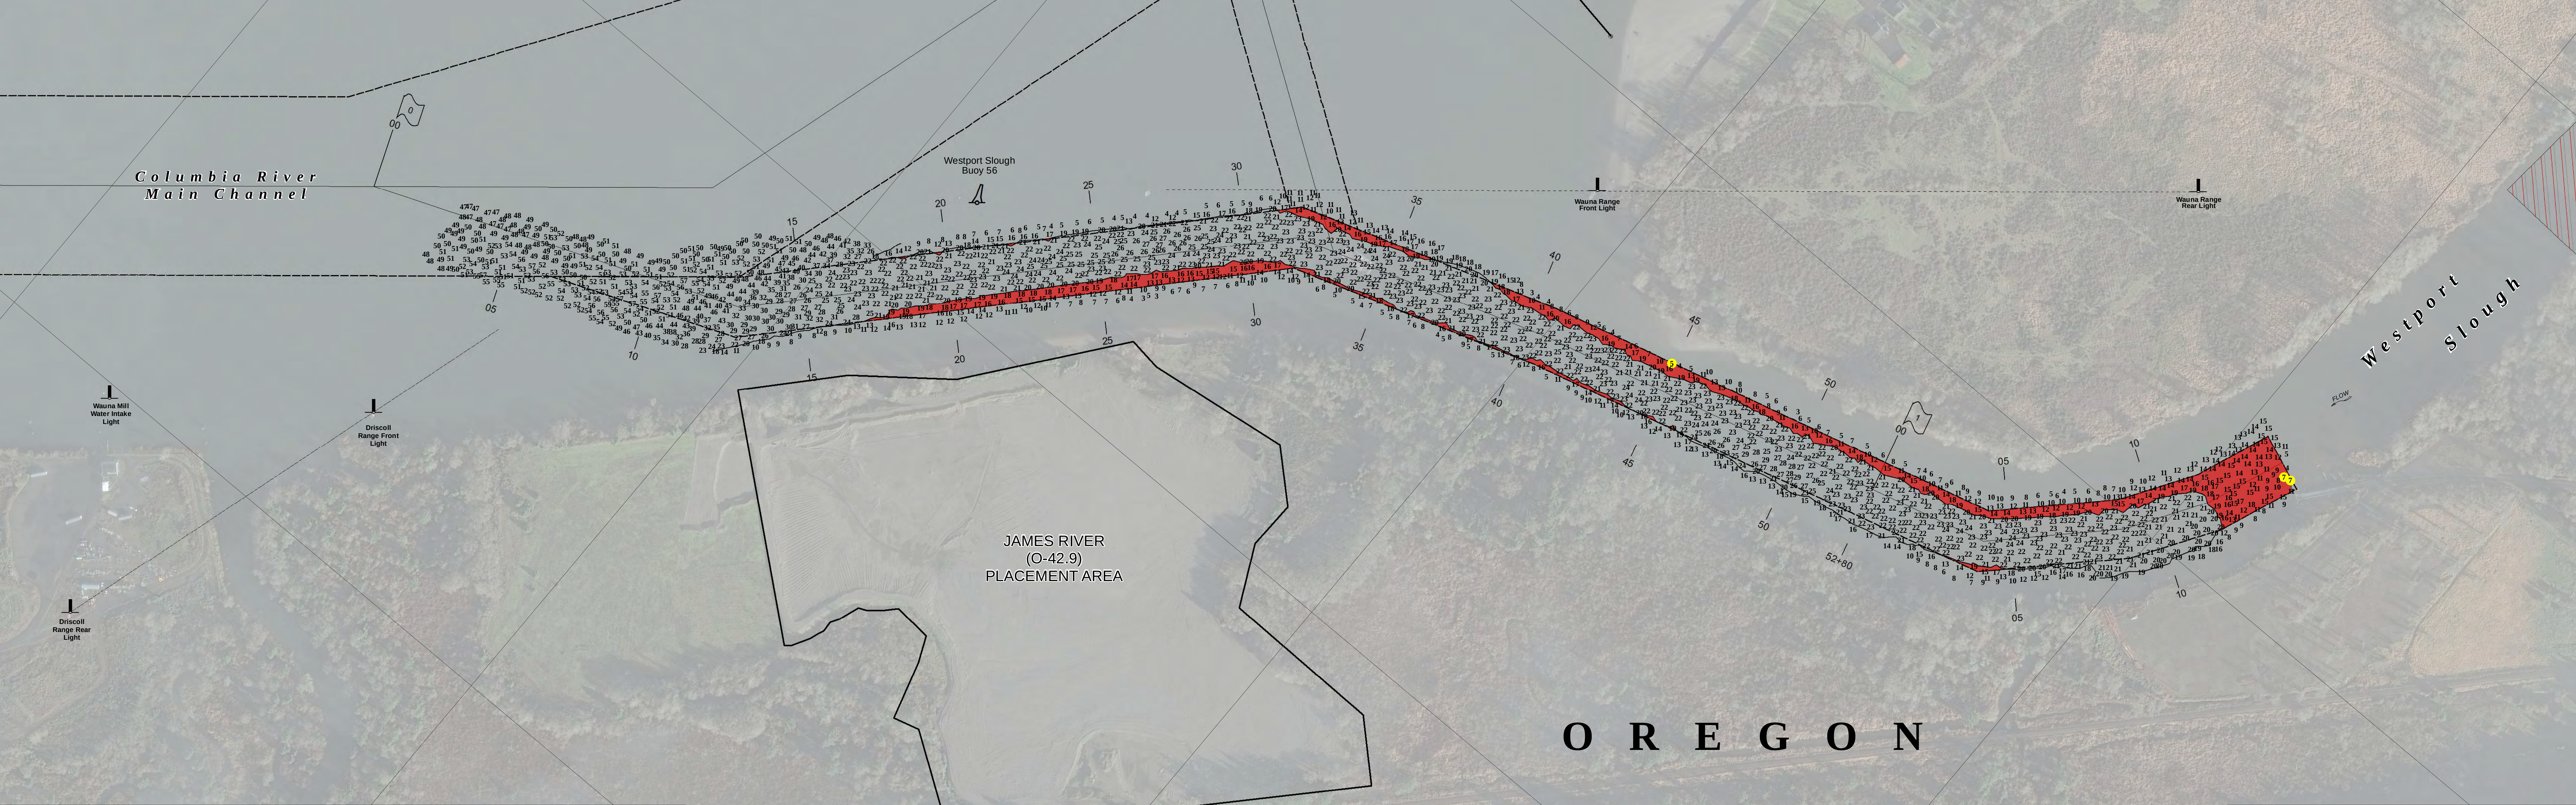


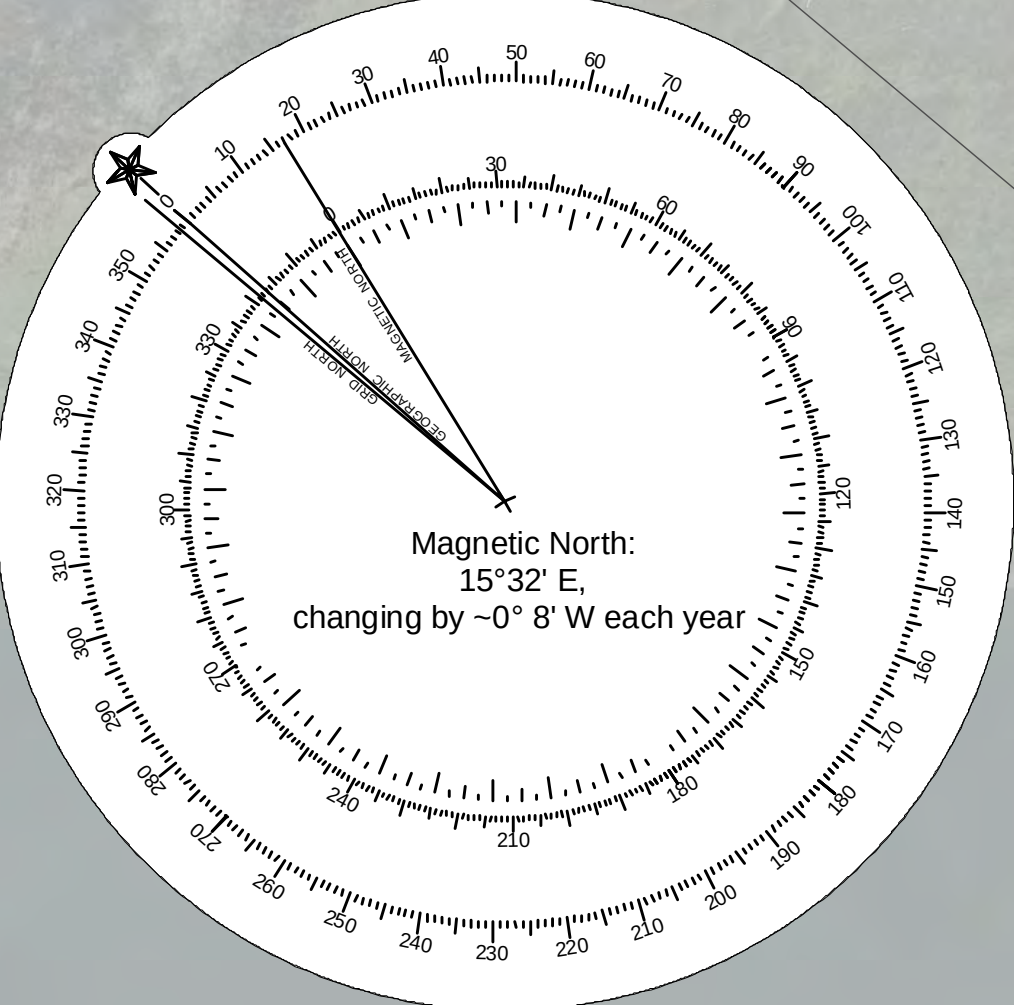

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Oregon North Zone. Distance units in U.S. Survey Feet.
Vertical Datum:
Soundings are shown in feet and indicate depths below Columbia River Datum. CRD is 1.46 feet above the North American Vertical Datum of 1988 (NAVD 88 Geoid 09) at Columbia River Mile 43.3, 1.49 feet above at River Mile 44.6.
River mileage conforms to the River Mile Index of the Hydrology and Hydraulics Committee, Pacific Northwest River Basins Commission, July 1972.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered to represent the general channel conditions existing at that time and is in support of channel maintenance only.

** Shoalest Sounding per Quarter per Reach

STAFF GAGE AT DIKE LIGHT 58: Northing: 917209 Easting: 7472226
STAFF GAGE AT DIKE 4458: Northing: 915247 Easting: 7478738

CONDITION ☒ PREDREDGE ☐ POSTDREDGE ☐

LEGEND

2017 Satellite Imagery data source: DigitalGlobe, Inc. - Reference is Navigation Chart No. 18523

THE EXISTING PROJECT
The existing project provides for a channel generally 200 feet wide and *28 feet deep from deep water in the Columbia River to the ferry dolphin.
*Channel maintenance depth is presently 20 feet based on user needs.

COLUMBIA AND LOWER WILLAMETTE RIVERS
BELOW VANCOUVER, WASH. AND PORTLAND, OREG.
COLUMBIA RIVER
WESTPORT SLOUGH
09 May 2024

0 200 400 600 800 1,000
SCALE IN FEET

SUBMITTED: _____ APPROVED: _____
RECOMMENDED: _____ CHIEF, WATERWAYS MAINTENANCE SECTION
CHIEF, SURVEY SECTION SURVEYED: _____ PLOTTED: _____ CHECKED: _____
CM_17_WSL_20240509_CS