
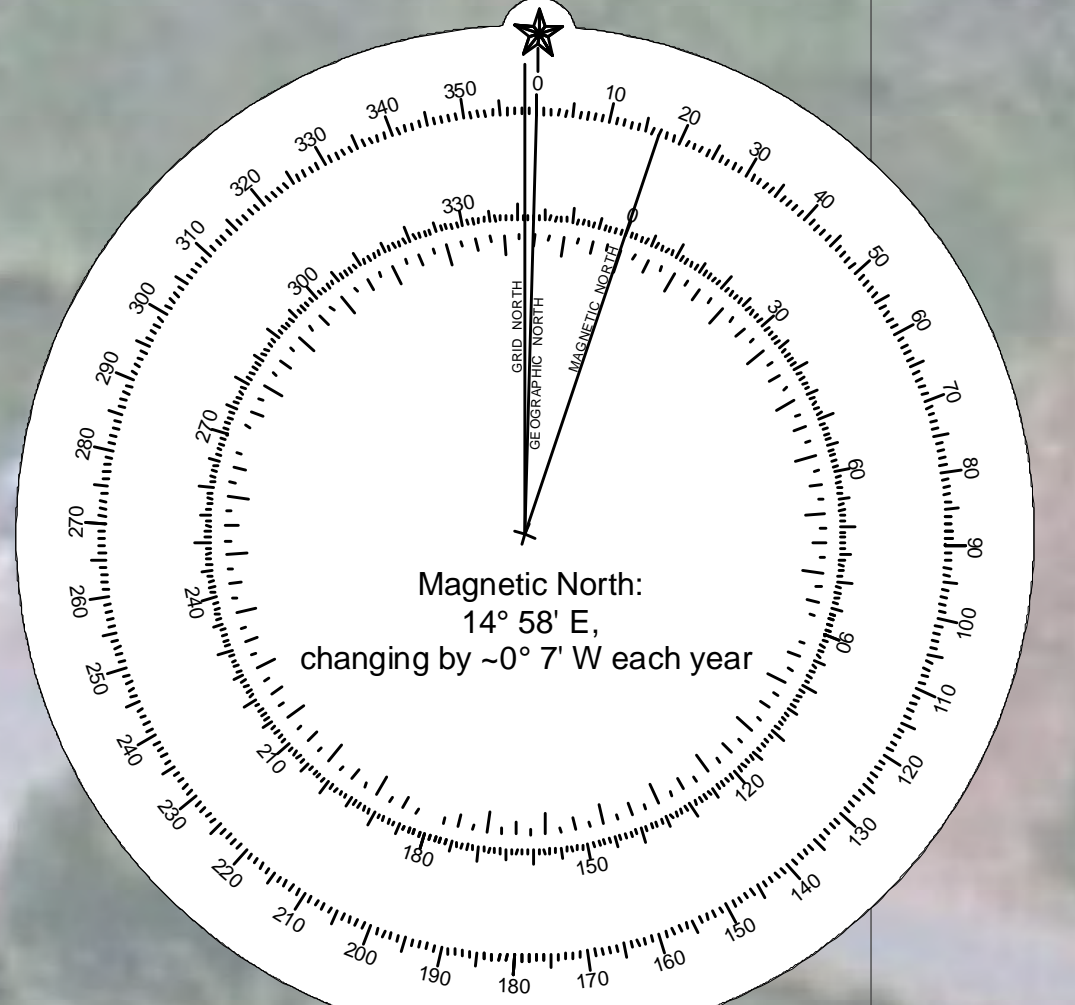


COQUILLE RIVER

Coquille River Buoy 15

Coquille River Light 14

Coquille River Entrance Range Front Light

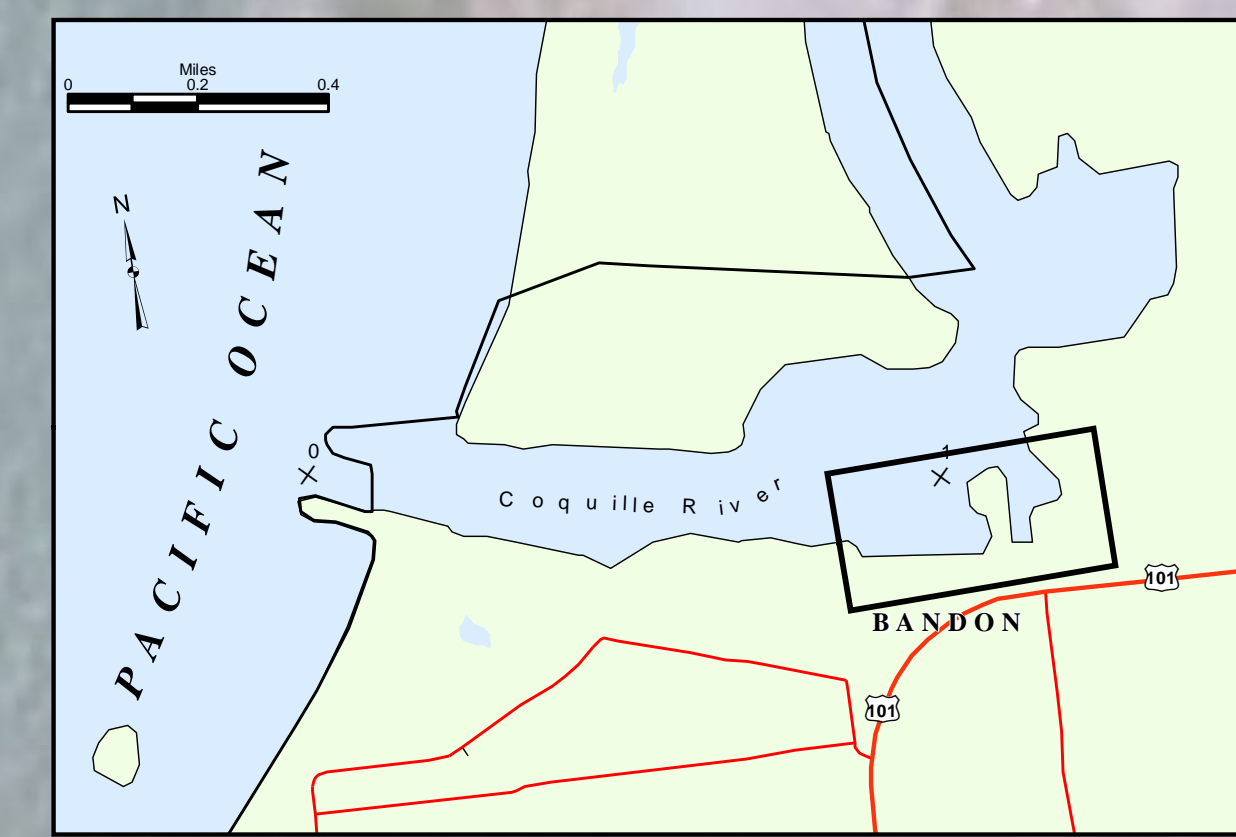

PORT OF BANDON DOCK

BANDON

THE EXISTING PROJECT
The existing project provides for an entrance channel 13 feet deep and 100 feet wide for a distance of 300 feet to an access channel 13 feet deep and 50 feet wide for 500 feet.

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Oregon South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water 1983-2001, MLLW is 0.11 feet below the North American Vertical Datum (NAVD 88).
River mileage conforms to the River Mile Index of the Hydrology and Hydraulics Committee, Pacific Northwest River Basins Commission, June 1968.
The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered to represent the general channel conditions existing at that time and is in support of channel maintenance only.
** Shoalest Sounding: per Quarter per Reach
STAFF GAGE AT BOAT RAMP (USACE): Northing: 554230 Easting: 3876597

LEGEND table with symbols for Federal Navigation Channel, Buoy, Lateral, Buoy, Cardinal, Buoy, Isolated Danger, Buoy, Safe Water, Buoy, Special Purpose, Beacon, General, Contour Lines, Benchmark, Pylon Bridge Support, Rock, Obstruction Point, Wreck-Submerged, Staff Gage, Recording Gage, Shoalest Sounding, etc.

COQUILLE RIVER, OREGON
BANDON BOAT BASIN
23 May 2024
SCALE IN FEET
SUBMITTED: APPROVED:
RECOMMENDED: CHIEF, WATERWAYS MAINTENANCE SECTION
CHIEF, SURVEY SECTION SURVEYED: PLOTTED: CHECKED:
CQ_02_BBB_20240523_CS

554,500

554,000

554,500

554,000