

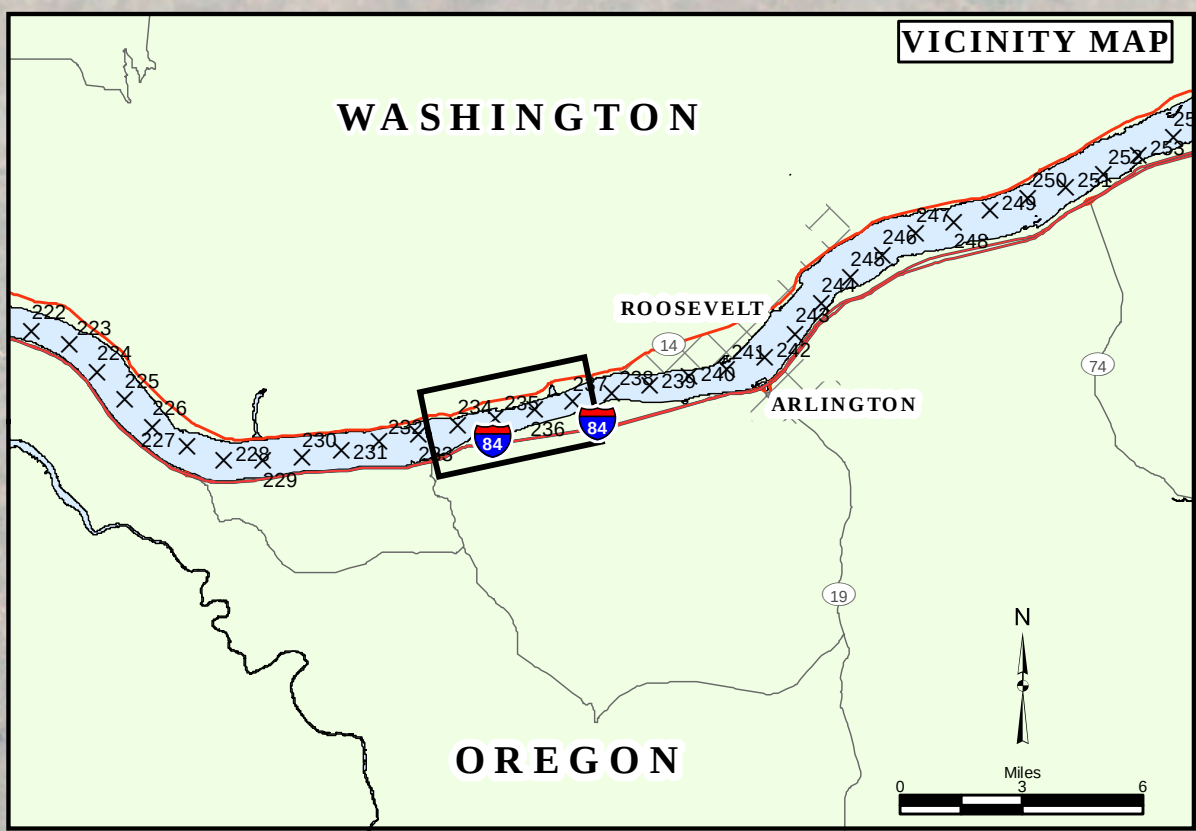


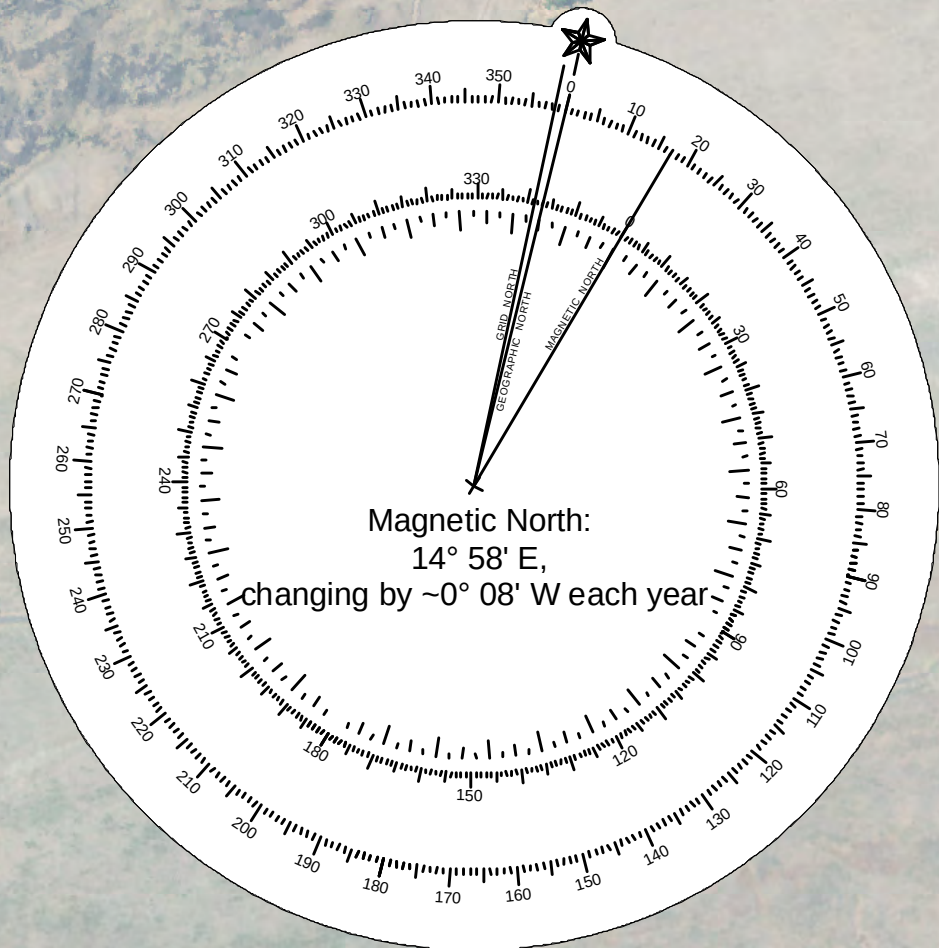

WASHINGTON

OREGON

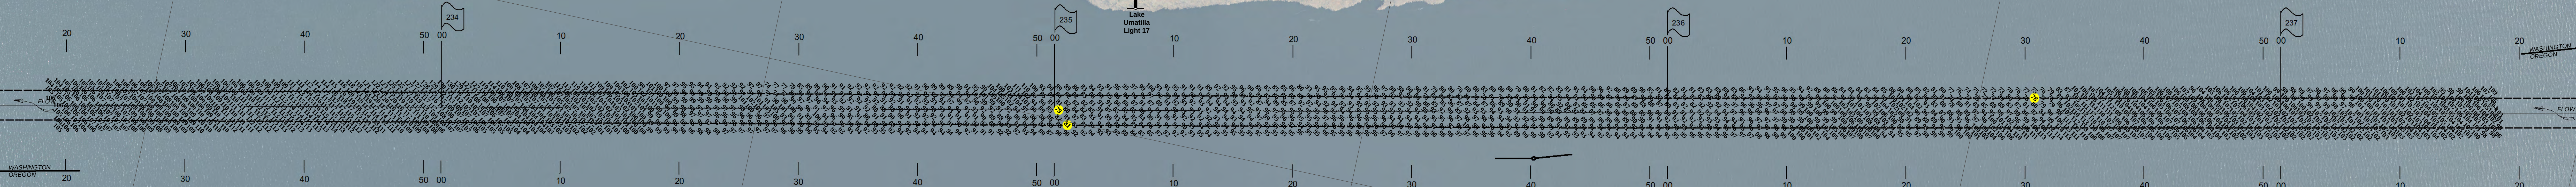

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Oregon North Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings and elevations are shown in feet and are referred to a datum plane which is 260.2 feet (Minimum Pool Elevation) above North American Vertical Datum of 1988 (NAVD 88).

River mileage conforms to the River Mile Index of the Hydrology and Hydraulics Committee, Pacific Northwest River Basins Commission, July 1972.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered to represent the general condition existing at that time.

** Shoalest Sounding per Quarter per Reach

CONDITION ☒ PREDREDGE ☐ POSTDREDGE ☐

THE EXISTING PROJECT

Provides for a channel 14 feet deep and 250 feet wide from the Port terminal facilities at The Dalles to the John Day Dam.

LEGEND

- Federal Navigation Channel
- Federal Navigation Channel Centerline
- Pipeline, Submarine On Land Line
- Cable, Overhead
- Cable, Submarine
- Pipeline, Overhead
- Anchorage Area
- Dredged Material Placement Area
- Cable Area
- Pipeline Area
- Shoaling Area
- Buoy, Lateral
- Buoy, Cardinal
- Buoy, Isolated Danger
- Buoy, Safe Water
- Buoy, Special Purpose
- Beacon, General
- Contour Lines
- Benchmark
- Pylon Bridge Support
- Rock
- Obstruction Point
- Wreck-Submerged
- Staff Gage
- Recording Gage
- Shoalest Sounding**

COLUMBIA RIVER BETWEEN
THE DALLES DAM AND MCNARY DAM
COLUMBIA RIVER
SUNDALE REACH

02 May 2017

SCALE IN FEET

SUBMITTED: _____ APPROVED: _____

RECOMMENDED: _____ CHIEF, WATERWAY'S MAINTENANCE SECTION

CHIEF, SURVEY SECTION SURVEYED: _____ PLOTTED: _____ CHECKED: _____

CL_65_SDR_20170502_CS_POOL

8,255,000

8,235,000

8,240,000

8,245,000

740,000

8,250,000

750,000

745,000